






EURO-AC Series Cordsets


PVC Cable ❖ 22 AWG 300V Male & Female Plugs

Face View of Male	# of Poles	Color Code	Wire AWG Rating	Length	Male Straight	Female Straight	Female Right Angle
	3	1-Brown 2-Blue 3-Not Used 4-Green/Yellow	22 300V 4A	2 M 5 M 10 M	MEC-3MP-2M MEC-3MP-5M MEC-3MP-10M	MEC-3FP-2M MEC-3FP-5M MEC-3FP-10M	MEC-3FP-2M-R MEC-3FP-5M-R MEC-3FP-10M-R
	4	1-Brown 2-Blue 3-Black 4-Green/Yellow	22 300V 4A	2 M 5 M 10 M	MEC-4MP-2M MEC-4MP-5M MEC-4MP-10M	MEC-4FP-2M MEC-4FP-5M MEC-4FP-10M	MEC-4FP-2M-R MEC-4FP-5M-R MEC-4FP-10M-R
	5	1-Brown 2-White 3-Blue 4-Black 5-Green/Yellow	22 300V 4A	2 M 5 M 10 M	MEC-5MP-2M MEC-5MP-5M MEC-5MP-10M	MEC-5FP-2M MEC-5FP-5M MEC-5FP-10M	MEC-5FP-2M-R MEC-5FP-5M-R MEC-5FP-10M-R


Specifications:

Body: Oil Resistant Yellow PVC
 Insulator: Nylon
 Contacts: Copper Alloy with Gold Plating
 Coupling Nut: Nickel Plated Brass
 Cable: Oil Resistant Yellow PVC Jacket,
 Rated at 300V, 105°C, Non-Wicking,
 Non-Hygroscopic
 Conductors: 22 AWG, PVC Insulated
 O-Ring: BUNA-N
 Temperature: -40°C to +105°C (-40°F to +221°F)
 Protection: IP 67
 Approvals: U.S.: UL Recognized
 Canada: C-UL Recognized

Straight Male Plug

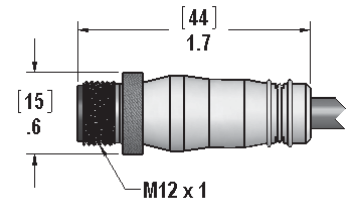

Straight Female Plug

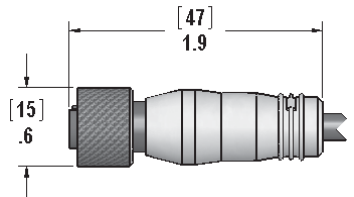

Right Angle Female Plug

