






# MIN Power Series Size I Cordsets

North American Color Code ❖ PVC Cable ❖ 14 AWG 600V Plugs

Face View of Male	# of Poles	Color Code	Wire AWG Rating	Length	Female Plugs		Male Plugs
					Straight	Right Angle	Straight
	3	1-Green/Yellow 2-Black 3-White	14  600V 18A	3 FT	MINH-3FP-3	MINH-3FP-3-R	MINH-3MP-3
6 FT				MINH-3FP-6	MINH-3FP-6-R	MINH-3MP-6	
12 FT				MINH-3FP-12	MINH-3FP-12-R	MINH-3MP-12	
20 FT				MINH-3FP-20	MINH-3FP-20-R	MINH-3MP-20	
30 FT				MINH-3FP-30	MINH-3FP-30-R	MINH-3MP-30	
	4	1-Black 2-White 3-Red 4-Green/Yellow	14  600V 15A	3 FT	MINH-4FP-3	MINH-4FP-3-R	MINH-4MP-3
6 FT				MINH-4FP-6	MINH-4FP-6-R	MINH-4MP-6	
12 FT				MINH-4FP-12	MINH-4FP-12-R	MINH-4MP-12	
20 FT				MINH-4FP-20	MINH-4FP-20-R	MINH-4MP-20	
30 FT				MINH-4FP-30	MINH-4FP-30-R	MINH-4MP-30	


### Specifications:

**Body:** 3 Pole: Oil Resistant Gray PVC  
 4 Pole: Oil Resistant Yellow PVC  
**Contacts:** Copper Alloy with Gold Plating  
**Coupling Nut:** Clear Anodized Aluminum  
**Cable:** 3 Conductors: Oil Resistant Gray PVC Jacket,  
 4 Conductors: Oil Resistant Yellow PVC Jacket,  
 Rated at 600V, 105°C, Non-Wicking,  
 Non-Hygroscopic, UL Style STOW or  
 AWM Style 2662  
**Conductors:** 14 AWG Bare Copper, PVC Insulated  
**Temperature:** -40°C to +105°C (-40°F to +221°F)  
**Protection:** IP 67  
**Approvals:** U.S.: UL Recognized  
 Canada: C-UL Recognized

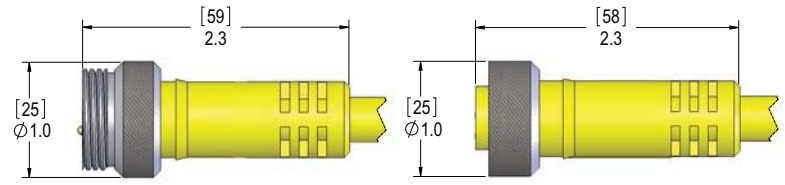


Straight Male Plug

Straight Female Plug

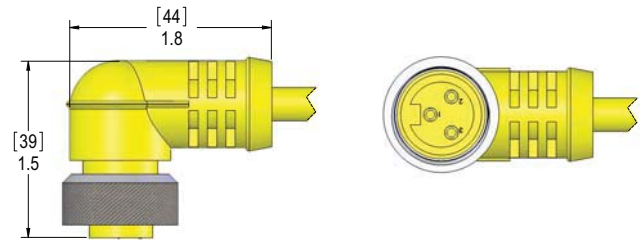

Right Angle Female Plug


Mixed Power						
Face View of Male	# of Poles	Color Code	Wire AWG Rating	Length	Part Number	
					Female Plug	Male Plug
	7	1-White w/ Black 2-Black 3-White 4-Red 5-Orange 6-Blue 7-Green/Yellow	14/2 600V 10A	12 FT	MINH-7FPX-12	MINH-7MPX-12
20 FT				MINH-7FPX-20	MINH-7MPX-20	
30 FT				MINH-7FPX-30	MINH-7MPX-30	



PVC Cable, rated at 105°C, 14/2, 18/5 AWM 2586, 600V. Pins 2 and 3 have 14 AWG wires.

**Approvals:** U.S.: UL Pending  
 Canada: C-UL Pending

# MIN Power Series Size I Cordsets


Male-Female Extension Cables ❖ PVC Cable ❖ 14 AWG 600V Plugs

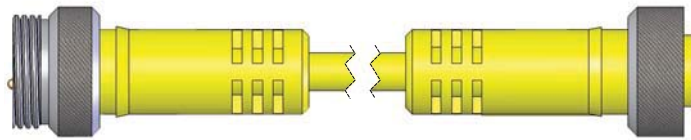


Face View of Male	# of Poles	Wire AWG Rating	Length	Part Number
	3	14 600V 18A	3 FT	MINH-3MFP-3
			6 FT	MINH-3MFP-6
			12 FT	MINH-3MFP-12
			20 FT	MINH-3MFP-20
			30 FT	MINH-3MFP-30
	4	14 600V 15A	3 FT	MINH-4MFP-3
			6 FT	MINH-4MFP-6
			12 FT	MINH-4MFP-12
			20 FT	MINH-4MFP-20
			30 FT	MINH-4MFP-30

MIN Power

Available options: for Extension Cables with right angle female ends, or stainless steel, please consult the factory.

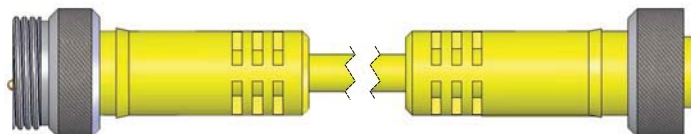

Mixed Power Male-Female Extension				
Face View of Male	# of Poles	Wire AWG Rating	Length	Part Number
	7	14/2 600V 10A	12 FT	MINH-7MFPX-12
			20 FT	MINH-7MFPX-20
			30 FT	MINH-7MFPX-30
		18/5 600V 5A		

PVC Cable, rated at 105°C, 14/2, 18/5 AWM 2586, 600V. Pins 2 and 3 have 14 AWG wires.

Approvals: U.S.: UL Pending  
Canada: C-UL Pending