




Profibus-DP Series Cordsets

MEC Male & Female Plugs ❖ Male - Female Extensions ❖ 3 Pole ❖ 22 AWG

Profibus-DP MEC Female Cordsets						
Face View of Female	# of Poles	Color Code	Wire AWG Rating	Length	Female Plugs	Female Right Angle
	3	PIN #1 - N/C PIN #2 - Green (Tx)D PIN #3 - N/C PIN #4 - Red (Rx)D PIN #5 - Shield	22 300V 4A	1 M 2 M 4 M 6 M 10 M	PBEC-3FP-1M PBEC-3FP-2M PBEC-3FP-4M PBEC-3FP-6M PBEC-3FP-10M	PBEC-3FP-1M-R PBEC-3FP-2M-R PBEC-3FP-4M-R PBEC-3FP-6M-R PBEC-3FP-10M-R

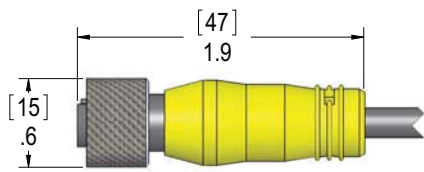


Straight Female Plug




Right Angle Female Plug




Profibus-DP MEC Male Cordsets & Male - Female Extension Cables						
Face View of Male	# of Poles	Color Code	Wire AWG Rating	Length	Male Plugs	Male - Female Extension Cables
	3	PIN #1 - N/C PIN #2 - Green (Tx)D PIN #3 - N/C PIN #4 - Red (Rx)D PIN #5 - Shield	22 300V 4A	1 M 2 M 4 M 6 M 10 M	PBEC-3MP-1M PBEC-3MP-2M PBEC-3MP-4M PBEC-3MP-6M PBEC-3MP-10M	PBEC-3MFP-1M PBEC-3MFP-2M PBEC-3MFP-4M PBEC-3MFP-6M PBEC-3MFP-10M

Specifications:

- Body: Yellow Flame Resistant PVC
- Contacts: Copper Alloy with Gold Plating
- Coupling Nut: Nickel Plated Brass
- Cable: Violet PVC Jacket
- Temperature: -40°C to +105°C (-40°F to +221°F)
- Protection: IP 67
- Approvals: U.S.: UL Recognized
Canada: C-UL Recognized

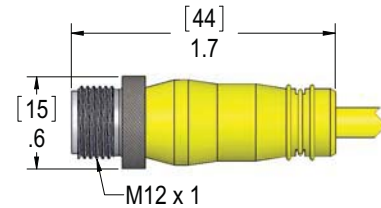

Straight Male Plug



Male - Female Extension

Profibus-DP Series